
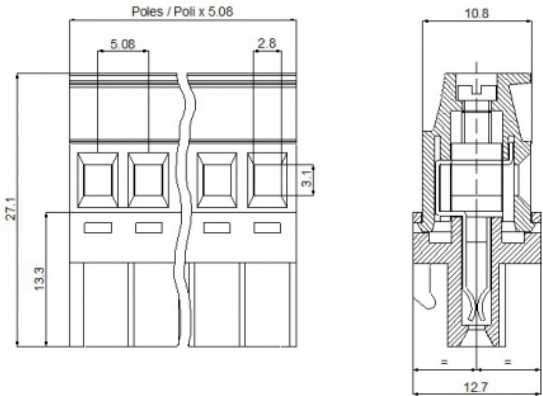


SV__-5,08-P

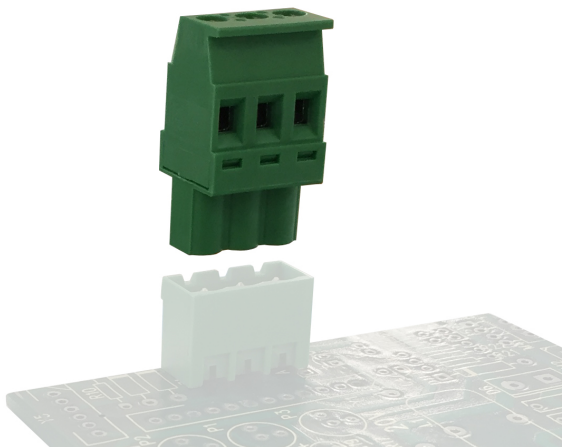

GENERAL INFORMATION

pitch	5,08 mm
Height	27.6 mm
Depth	23.5 mm
Dimensional class	Media
Wire section	2.5 mm² / 14 AWG
Clamp opening size	2.8 x 3.1 mm
Wire stripping	max 3 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	16 A
Voltage	250 V
impulse voltage	4 kV

MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

APPROVALS DATA



	EN 61984	EN 61984	UL 1059
Current	16 A	12 A	12 A factory / 12 A field
Voltage	250 V	250 V	300 V
Wire section	2.5 mm²	2.5 mm²	14 AWG
Torque	0.5 Nm	0.5 Nm	4.5 Lb-in
FILE	CA02.04178	40005779	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Nickel-plated copper alloy
SCIP Number	269cc4c7-8d06-4994-abfa-5163d2b356bd

COLOURS

Standard		On request					
GN		GY	BK	BL	RD	YL	OG
POLES	NAME						3D FILE
02	SV02-5,08-P						File available
03	SV03-5,08-P						File available
04	SV04-5,08-P						File available
05	SV05-5,08-P						File available
06	SV06-5,08-P						File not available for this product
07	SV07-5,08-P						File available
08	SV08-5,08-P						File available
09	SV09-5,08-P						File available
10	SV10-5,08-P						File available
11	SV11-5,08-P						File available
12	SV12-5,08-P						File available
13	SV13-5,08-P						File available
14	SV14-5,08-P						File available
15	SV15-5,08-P						File available
16	SV16-5,08-P						File available
17	SV17-5,08-P						File available
18	SV18-5,08-P						File available
19	SV19-5,08-P						File available
20	SV20-5,08-P						File available
21	SV21-5,08-P						File available
22	SV22-5,08-P						File available
23	SV23-5,08-P						File available
24	SV24-5,08-P						File available