
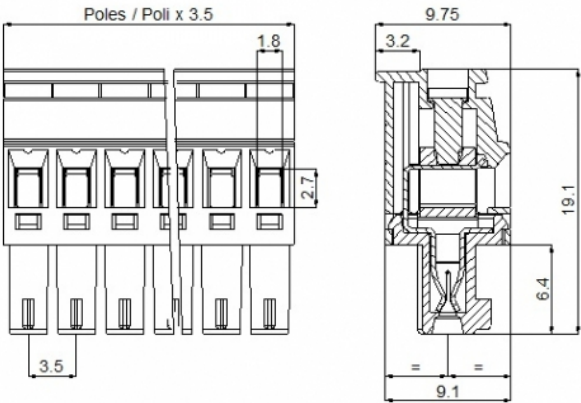


SV__-3,5-F

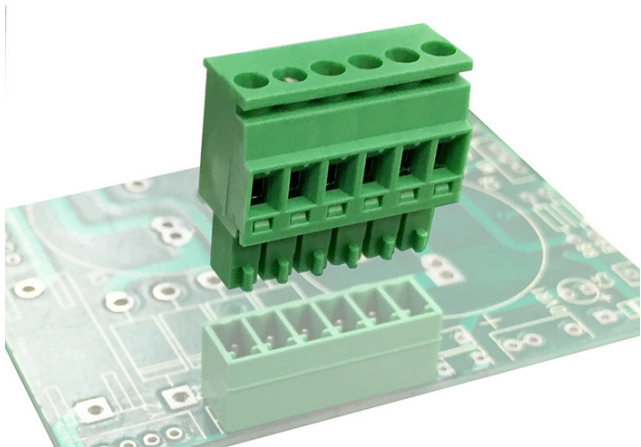

GENERAL INFORMATION

pitch	3,5 mm
Height	19.1 mm
Depth	9.75 mm
Dimensional class	Media
Wire section	2.5 mm² / 14 AWG
Clamp opening size	1.8 x 2.7 mm
Wire stripping	max 7 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	11 A
Voltage	160 V
impulse voltage	2.5 kV

MECHANICAL CHARACTERISTICS

Screw	M2
Recommended torque	0.25÷0.27 Nm / 2.3÷2.5 in.lbs

APPROVALS DATA



	EN 61984	UL 1059
Current	11 A	11 A factory / 11 A field
Voltage	200 V	300 V
Wire section	-	14 AWG
Torque	-	2.3 Lb-in
FILE	40048261	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Tin-plated copper alloy
SCIP Number	873c875e-ec80-466b-a1f7-2cd8e6506a38

COLOURS

Standard	On request
----------	------------



POLES

02
03
04
05
06
07
08
09
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24

NAME

SV02-3,5-F
SV03-3,5-F
SV04-3,5-F
SV05-3,5-F
SV06-3,5-F
SV07-3,5-F
SV08-3,5-F
SV09-3,5-F
SV10-3,5-F
SV11-3,5-F
SV12-3,5-F
SV13-3,5-F
SV14-3,5-F
SV15-3,5-F
SV16-3,5-F
SV17-3,5-F
SV18-3,5-F
SV19-3,5-F
SV20-3,5-F
SV21-3,5-F
SV22-3,5-F
SV23-3,5-F
SV24-3,5-F

3D FILE

File available
File available
File not available for this product
File available
File available
File available
File available
File available
File available
File available
File available
File available
File available
File available
File available
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product