
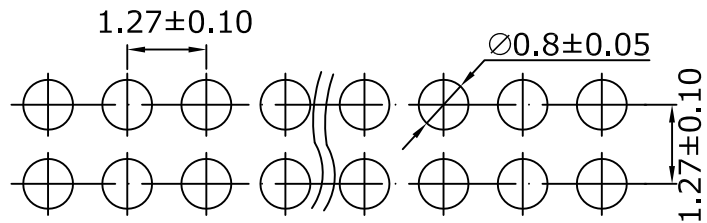


## SPECIFICATIONS



Current Rating: 1A  
 Contact Resistance: 20m Ω Max  
 Insulation Resistance: 1000M Ω Min  
 Withstanding Voltage: 500V AC for 1 minute  
 Temperature Range: -40°C to +105°C  
 Contact: Phosphor Bronze, Gold plated  
 Insulator: NY6T+30%G.F., UL94V-0

## ORDER INFORMATION

M	L	12	34	X	2 - 2	XX
Straight type		Height=3.4mm		NY6T		No. of Contacts Per Row
Pitch 1.27mm		G0:Gold Flash		S0:Selective Flash		Dual Row
		G1:Gold 3u"		S1:Selective 3u"		
		G2:Gold 5u"		S2:Selective 5u"		
		G3:Gold 10u"		S3:Selective 10u"		
		G4:Gold 15u"		S4:Selective 15u"		
		G5:Gold 30u"		S5:Selective 30u"		

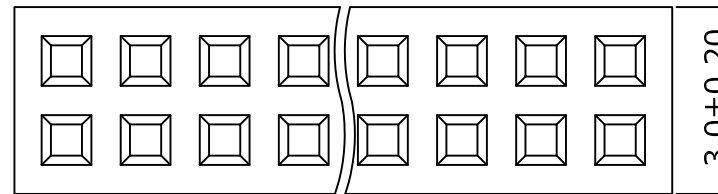

Recommended PCB Layout

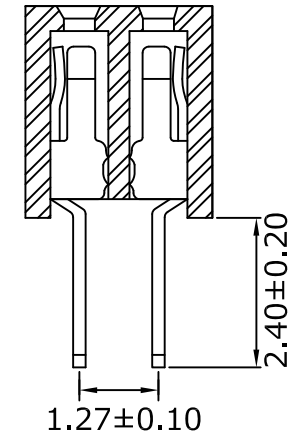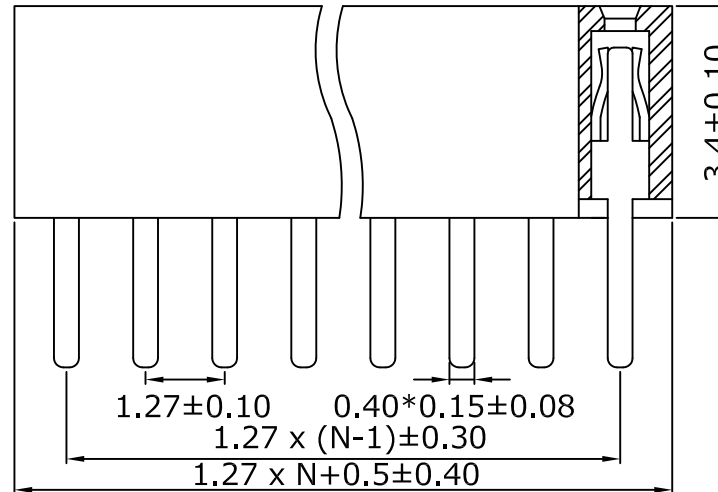

**M** Morecrafts Technology  
 TEL: +886-2-2966-1326  
 FAX: +886-2-2966-1352  
 www.morecrafts.com.tw

PART NO.	ML1234X2-2XX	DRAWN	Andrew
DRAWING NO.	ML1234X2-2XX	CHECKED	Claudia
DATE	2019/02/25	APPROVED	Brian

TITLE:	Female Header 1.27mm H=3.4mm	REV.	A0	TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	1:1	UNIT	mm
--------	------------------------------	------	----	-----------	-----------------------	-------	-----	------	----