
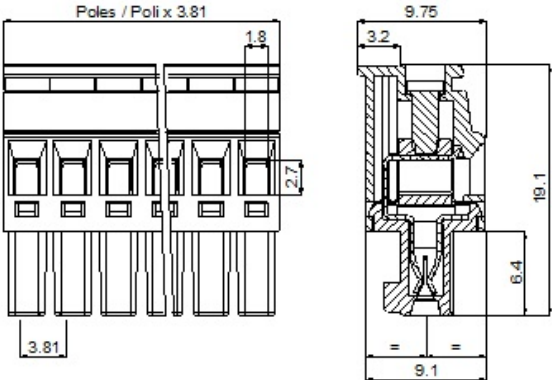


SV__-3,81-P

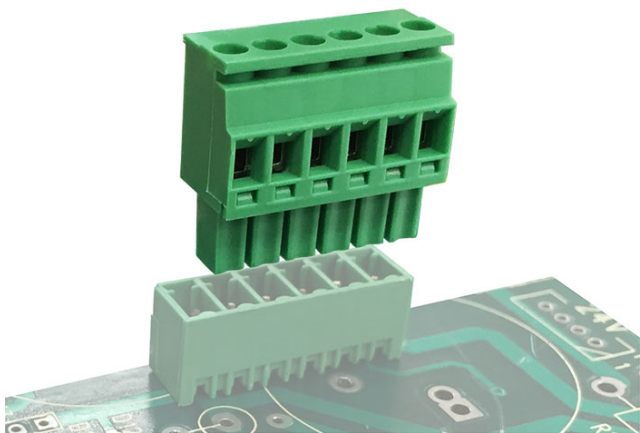

GENERAL INFORMATION

pitch	3,81 mm
Height	19.1 mm
Depth	9.75 mm
Dimensional class	Media
Wire section	1.5 mm² / 16 AWG
Clamp opening size	1.8 x 2.7 mm
Wire stripping	max 7 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	11 A
Voltage	160 V
impulse voltage	2.5 kV

MECHANICAL CHARACTERISTICS

Screw	M2
Recommended torque	0.25÷0.275 Nm / 2.3÷2.5 in.lbs

APPROVALS DATA



Current	-
Voltage	-
Wire section	-
Torque	-
FILE	-

EN 61984

11 A
200 V
2.5 mm²
0.25 Nm
40048261

UL 1059

11 A factory / 11 A field
300 V
14 AWG
2.3 Lb-in
E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Tin-plated copper alloy
SCIP Number	873c875e-ec80-466b-a1f7-2cd8e6506a38

COLOURS



On request



POLES

02
03
04
05
06
07
08
09
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24

NAME

SV02-3,81-P
SV03-3,81-P
SV04-3,81-P
SV05-3,81-P
SV06-3,81-P
SV07-3,81-P
SV08-3,81-P
SV09-3,81-P
SV10-3,81-P
SV11-3,81-P
SV12-3,81-P
SV13-3,81-P
SV14-3,81-P
SV15-3,81-P
SV16-3,81-P
SV17-3,81-P
SV18-3,81-P
SV19-3,81-P
SV20-3,81-P
SV21-3,81-P
SV22-3,81-P
SV23-3,81-P
SV24-3,81-P

3D FILE

File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product