
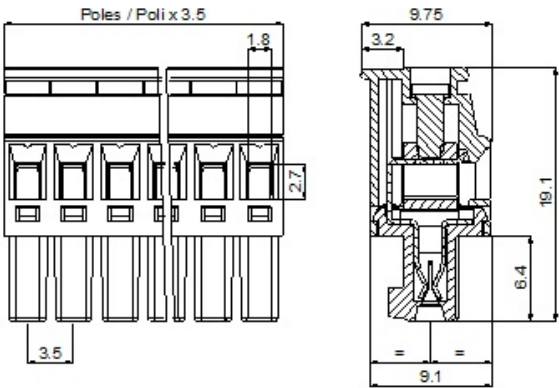


SV__-3,5-P

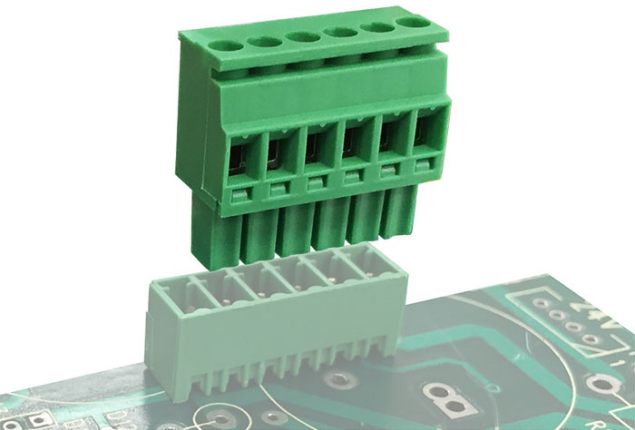

GENERAL INFORMATION

pitch	3,5 mm
Height	19.1 mm
Depth	9.75 mm
Dimensional class	Media
Wire section	2.5 mm² / 14 AWG
Clamp opening size	1.8 x 2.7 mm
Wire stripping	max 7 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	11 A
Voltage	160 V
impulse voltage	2.5 kV

MECHANICAL CHARACTERISTICS

Screw	M2
Recommended torque	0.25÷0.27 Nm / 2.3÷2.5 in.lbs

APPROVALS DATA



Current	-	EN 61984	11 A	UL 1059	11 A factory / 11 A field
Voltage	-		200 V		300 V
Wire section	-		-		14 AWG
Torque	-		-		2.3 Lb-in
FILE	-		40048261		E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Tin-plated copper alloy
SCIP Number	873c875e-ec80-466b-a1f7-2cd8e6506a38

COLOURS

Standard		On request					
GN		GY	BK	BL	RD	YL	OG
POLES	NAME						3D FILE
02	SV02-3,5-P						File available
03	SV03-3,5-P						File not available for this product
04	SV04-3,5-P						File available
05	SV05-3,5-P						File available
06	SV06-3,5-P						File available
07	SV07-3,5-P						File available
08	SV08-3,5-P						File available
09	SV09-3,5-P						File available
10	SV10-3,5-P						File available
11	SV11-3,5-P						File available
12	SV12-3,5-P						File available
13	SV13-3,5-P						File not available for this product
14	SV14-3,5-P						File not available for this product
15	SV15-3,5-P						File not available for this product
16	SV16-3,5-P						File not available for this product
17	SV17-3,5-P						File not available for this product
18	SV18-3,5-P						File not available for this product
19	SV19-3,5-P						File not available for this product
20	SV20-3,5-P						File not available for this product
21	SV21-3,5-P						File not available for this product
22	SV22-3,5-P						File not available for this product
23	SV23-3,5-P						File not available for this product
24	SV24-3,5-P						File not available for this product