

SPECIFICATIONS





Current Rating: 3Amps
 Contact Resistance: 20m Ω Max
 Insulation Resistance: 1000M Ω Min
 Withstanding Voltage: 500V AC for 1 minute
 Temperature Range: -40°C to +105°C

MATERIAL

Contact: Phosphor Bronze
 Insulator: PBT, UL94V-0

ORDER INFORMATION

M	L	25	71	X	1 - 2	XX
Straight Type		Height=7.1mm		PBT		No. of Contacts Per Row (02~40)
Pitch 2.54mm		G0:Gold Flash		S0:Selective Flash		Dual Row
		G1:Gold 3u"		S1:Selective 3u"		
		G2:Gold 5u"		S2:Selective 5u"		
		G3:Gold 10u"		S3:Selective 10u"		
		G4:Gold 15u"		S4:Selective 15u"		
		G5:Gold 30u"		S5:Selective 30u"		

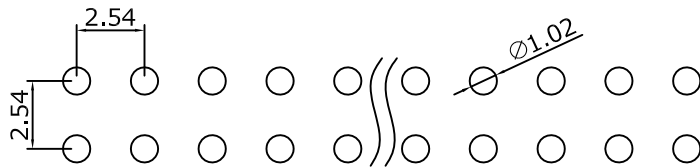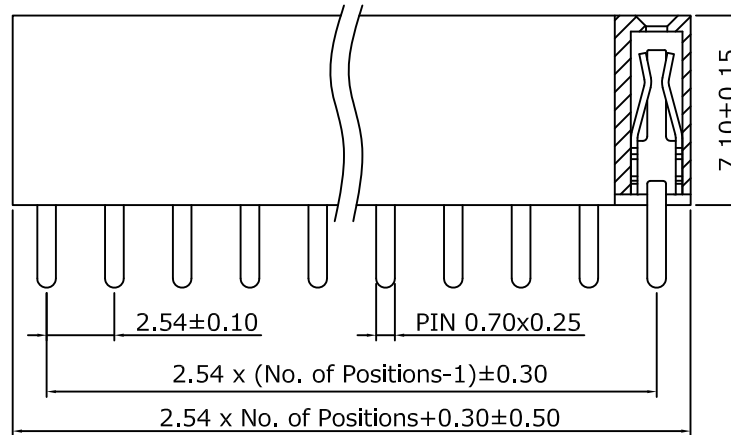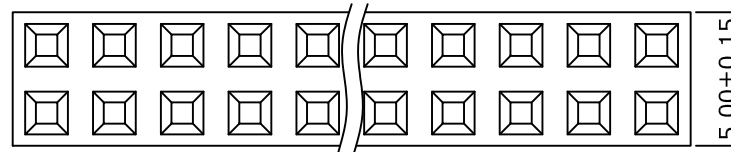

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

M Morecrafts Technology
 TEL: +886-2-2966-1326
 FAX: +886-2-2966-1352
 www.morecrafts.com.tw

PART NO.	ML2571X1-2XX	DRAWN	Andrew
DRAWING NO.	ML2571X1-2XX	CHECKED	Claudia
DATE	2016/07/22	APPROVED	Brian

TITLE:	REV.	TOLERANCE	SCALE	UNIT
Female Header 2.54mm H=7.1mm	A0	.X ±0.25 .XX ±0.20	1:1	mm