
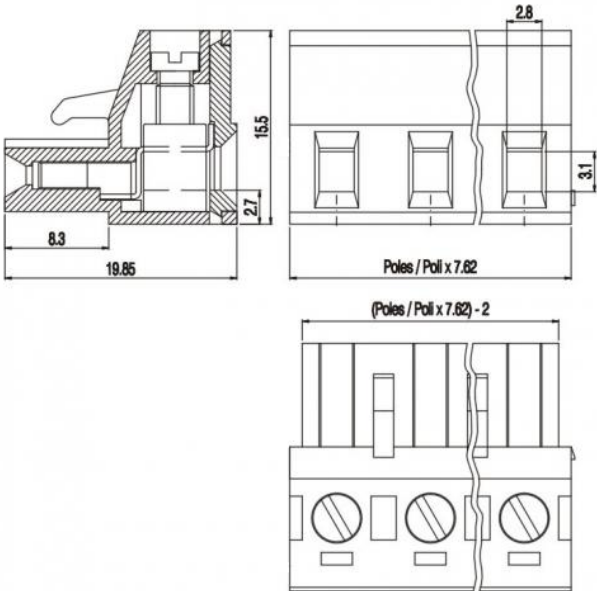


SH__-7,62

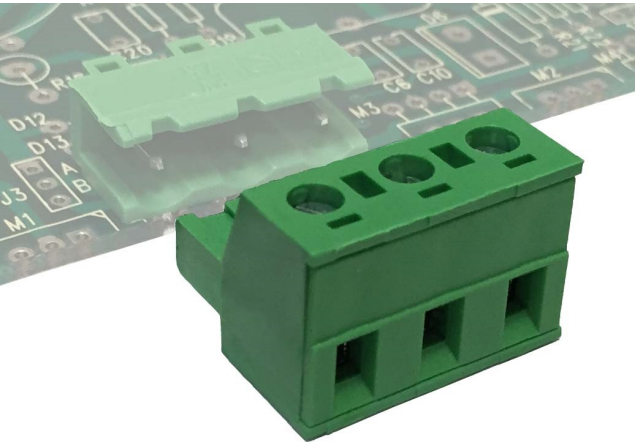

GENERAL INFORMATION

pitch	7,62 mm
Height	15.50 mm
Depth	19.85 mm
Dimensional class	Media
Wire section	2.5 mm² / 14 AWG
Clamp opening size	2.8 x 3.1 mm
Wire stripping	max 8 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	16 A
Voltage	500 V
impulse voltage	6 kV

MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

APPROVALS DATA



	EN 60998-1	EN 60998-1	UL 1059
Current	16 A	15 A	12 A factory / 12 A field
Voltage	500 V	500 V	300 V
Wire section	2.5 mm²	2.5 mm²	14 AWG
Torque	0.5 Nm	0.5 Nm	4.5 Lb-in
FILE	CA02.04178	40005779	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy

Terminal	Nickel-plated copper alloy						
SCIP Number	2b16c5e0-b81c-4d1f-839d-5472703af01d						
COLOURS							
	Standard	On request					
							
POLES	NAME			3D FILE			
02	SH02-7,62			File available			
03	SH03-7,62			File available			
04	SH04-7,62			File available			
05	SH05-7,62			File available			
06	SH06-7,62			File available			
07	SH07-7,62			File available			
08	SH08-7,62			File available			
09	SH09-7,62			File available			
10	SH10-7,62			File available			